


# TOLKO PARALLEL LAMINATED VENEER DOOR COMPONENTS



HINGE STILE

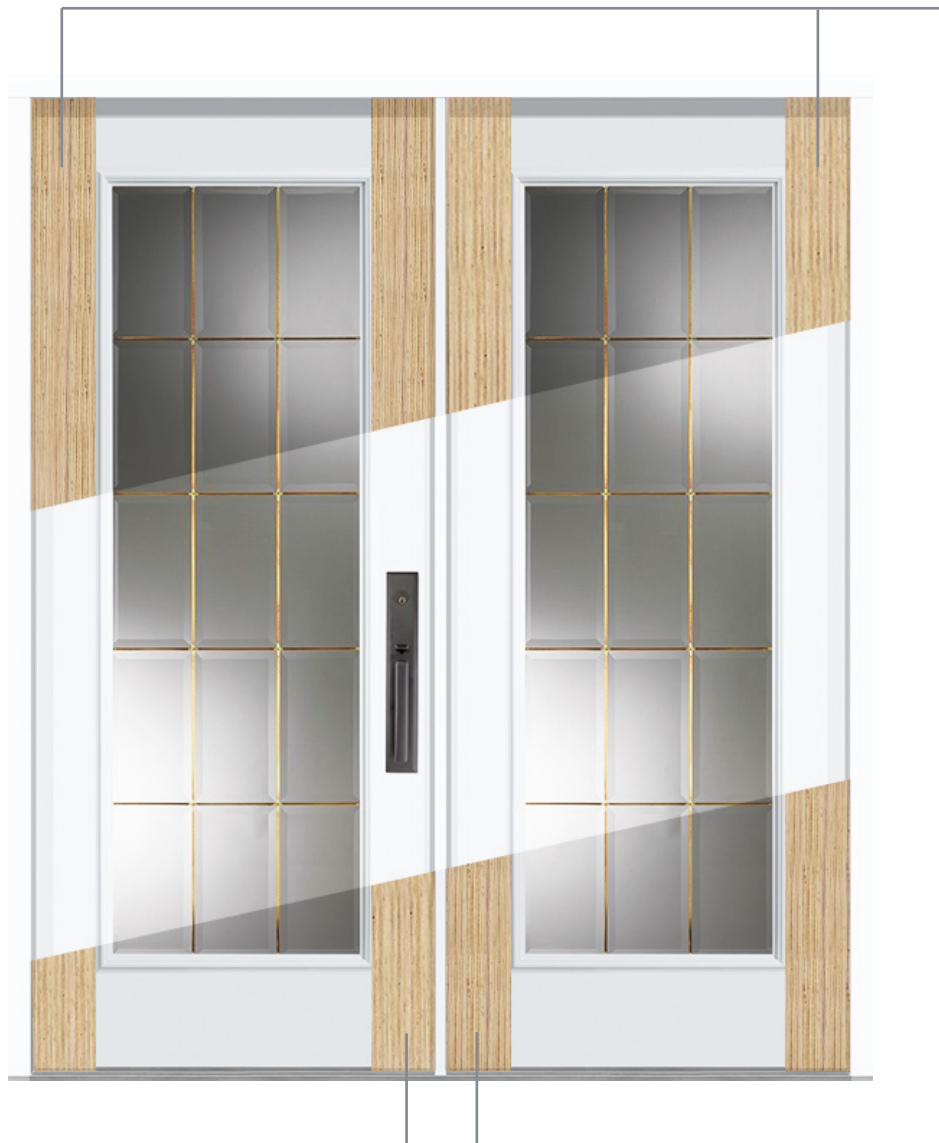

LOCK STILE

## Parallel Laminated Veneer

Secure your door with PLV on the full length of the lock stile and hinge stile.

### Superior Stability

Doors with large cutouts require sturdy, dependable hinge and lock stiles to support the door. PLV has a high strength-to-weight ratio and excellent dimensional stability compared to other composite and solid wood products.

### Improved Fastener Holding

Consistent density yields improved fastener holding results compared to solid sawn wood. Solid sawn wood has variation which can lead to mixed performance.

### Consistency

Each piece of Tolko PLV is 100% usable with quality you can count on. This eliminates the need to cull, sort and cut out defects, to maximize recovery and efficiency in your plant.

### Environmentally Responsible

All Tolko products are manufactured to PEFC, SFM, and SFI standards. SFI fully qualifies under the LEED standard via the LEED Alternative Compliance Path process.

#### Tolko PLV Industrials

Application	Industrial
Construction	All parallel layup Customer-defined cross bands
Thickness Category	3/4", 7/8", 1-1/8", 1-3/8", 1-1/2", 1-5/8", 1-3/4"
Lengths	96", 97"
Widths	48", 49"

