

T-STRAND[™] PRO OSB STAIR TREAD



Tolko T-STRAND Pro OSB Stair Treads are engineered to provide exceptional stair systems for residential and commercial construction projects. These uniform stair treads provide greater dimensional stability than solid-sawn lumber and greater spanning capability than competitively priced composite materials. The consistency and durability of T-STRAND OSB reduces material waste, construction costs and the need for temporary stair treads.

FEATURES AND BENEFITS

- \checkmark Knot-free and stay flat over time with no cupping, splitting, or warping
- Manufactured to be straight at a consistently precise thickness, resulting in stronger stairs at a better price
- Bull-nosed profile
- 🧹 Easy installation
- Meets the APA's Sturd-I-Floor® grade, additional requirements set out in APA Series Guidelines for Stair Treads, and building code requirements including Product Standard PS 2-18
- \checkmark Enhanced protection from the elements with our red end seal
- Available with optional zinc borate treatment
- ✓ CARB, HUD, and EPA TSCA TITLE VI exempt.
- Contains no added urea-formaldehyde resin

ENGINEERED TO WORK TOGETHER

For a high performing stair system, pair your tread with the T-TEC LSL Stair Stringer and choose T-STRAND OSB for a cost-effective riser.



Backed by Tolko's 50

Year Limited Warranty



T-STRAND PRO OSB STAIR TREAD

TOLKO TSTRAND PRO


Product Application	Stair Tread
Profile1	Bull-nosed
Thickness Category	1"
Lengths ^{2,3}	12', 14'
Widths ^{2,3}	11-1/2"
Bundle	84 pieces
Moisture-Resistant End Seal	Colour: Rustic Red
Zinc Borate Treatment	Optional ZB TREATED
Warranty	50-year warranty against delamination

1 Square-edge available upon request on a custom order basis.

2 For promotional purposes, lengths and widths are nominal sizes; actual product dimensions comply with U.S. Weights and Measures requirements. 3 Contact your Tolko Representative for custom lengths and widths.

THE ENGINEERED DIFFERENCE

Tolko T-STRAND Pro OSB Stair Treads are easy to install with no specialized training required for trades. With a precision bull-nosed profile this product is designed to work with any finished flooring material. T-STRAND Pro OSB Stair Tread is backed by Tolko's 50 Year Limited Warranty, making it the most advanced stair tread warranty on the market.

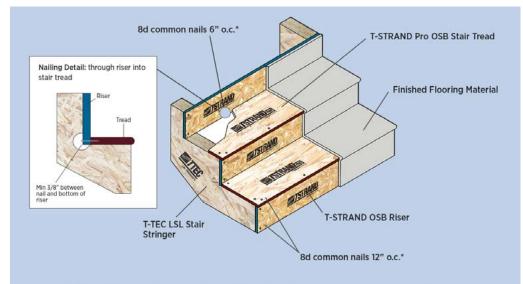

*Predrill tread end grain at mid-thickness with 3/32" bit. Maintain at least 3/8" edge distance in riser.

ZINC BORATE TREATMENT

Zinc borate provides protection against decay fungi/rot and Wood Destroying Organisms (WDO) such as termites, including the Formosan Subterranean Termite.



Our ZB treated products are manufactured at Tolko's Athabasca mill and are approved for use as defined in AWPA U1, Use Category UC2. APA Product Report PR-N216 confirms that ZB treated T-STRAND OSB meets the performance requirements of PS 2.



Tolko Industries Ltd. 3000 - 28th Street Vernon, BC V1T 9W9 Canada

TELEPHONE 250.549.5311 EMAIL EWPsales@tolko.com website tolko.com











entations, warranties or conditions, whether express or implied, statutory or otherwise including, without any limitation, any representations, warranties or conditions. For more information please visit tolko.com/resources or contact